

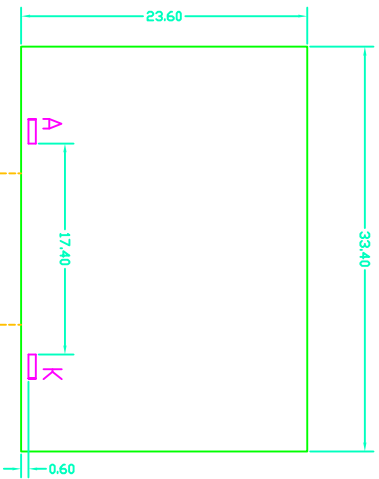
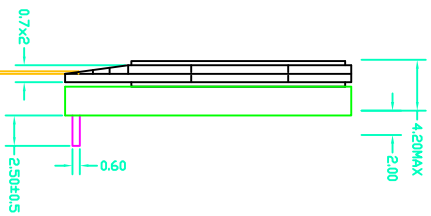


Customer No.:

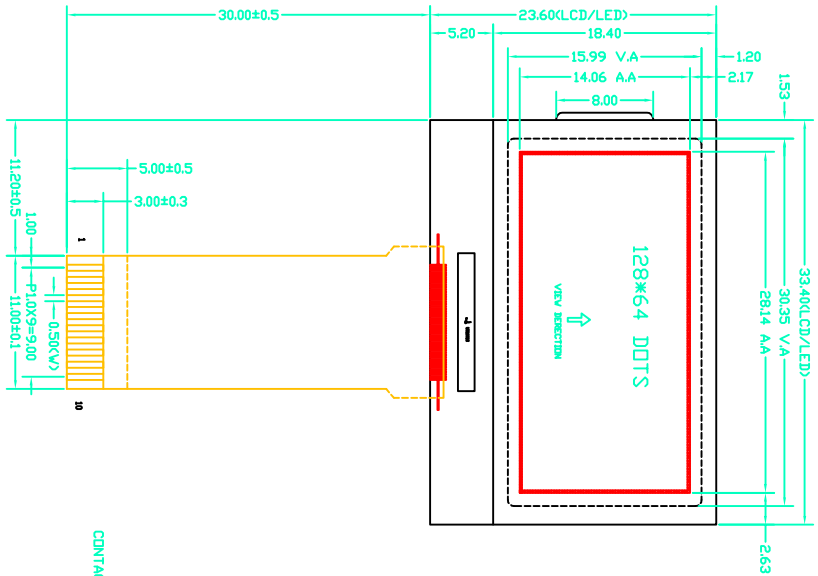

PIN	SYMBOL
1	VLCD
2	VBO+
3	VBO-
4	VB1-
5	VB1+
6	VSS
7	VDD
8	RST
9	SCL
10	SDA



THE BACK SIDE

NOTES:

1. OPERATING TEMPERATURE: -20°C TO 70°C
STORAGE TEMPERATURE: -30°C TO 80°C
2. LCD MODEL: FSTN/POSITIVE/TRANSPARENT
3. 1/64 DUTY, 1/9 BAIS, VDD=3.0V
4. VIEWING ANGLE: 300 °/CLOCK
5. B/L: LED WHITE(Vled=2.8~3.3V, If=30mA)
6. DRIVER: UC1601S
7. ROHS COMPLIANT

CUSTOMER APPROVE		AMEND		NO.	NAME	QTY	Part No.	VENDOR REF NOTE
Mechanical	Electrical							
△	△							
△	△							
△	△							
△	△							
△	△							
ND								

TOLERANCE		名称	
DECIMAL	角		
.x ± .30	°		
.xx ± .20			
± 1/4°			

PRODUCT NO.	DRAW NO.	REV
TNS-G12864FGRSW-50W		3

CHKD	APPD	UNIT	SHEET
		mm	分頁号