
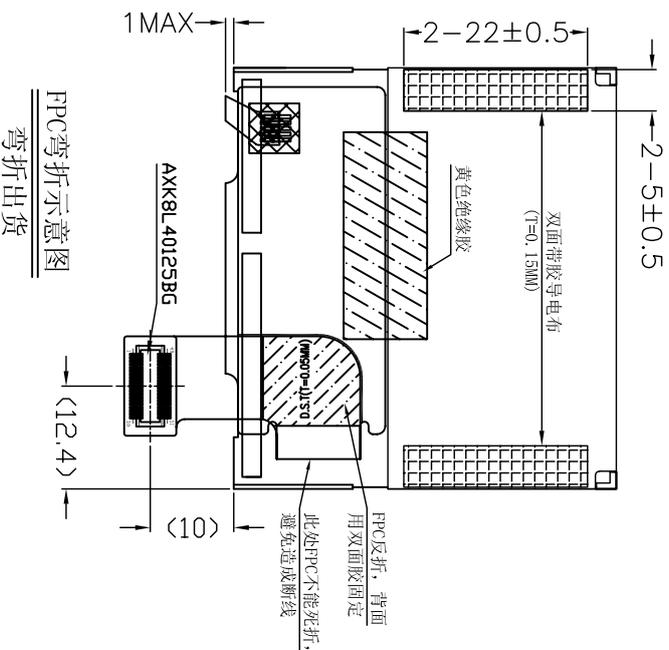


PIN ASSIGNMENT:

1	GND
2	VCI
3	TE
4	GND
5	RESET
6	GND
7	DE0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	DB8
16	DB9
17	DB10
18	DB11
19	DB12
20	GND
21	GND
22	DB13
23	DB14
24	DB15
25	DB16
26	DB17
27	GND
28	CS
29	RS
30	WR
31	RD
32	GND
33	IF0
34	IF1
35	VDD
36	GND
37	LED-
38	LED+
39	LCM_ID
40	GND

IF2: 接高电平1,
IF3: 接低电平0.

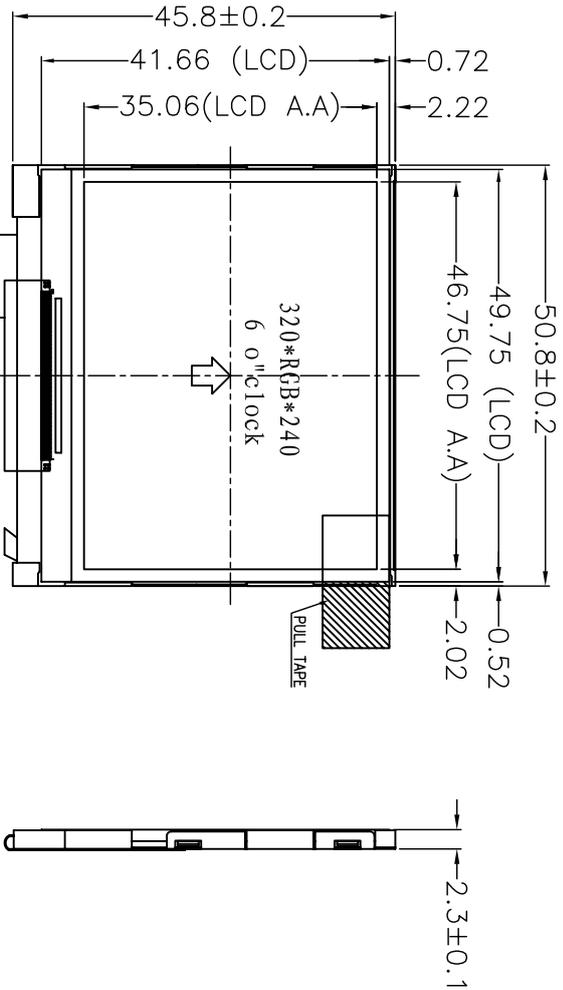

IF=15mA VF=12.6+/-1 V

- NOTES:
1. DISPLAY TYPE: 262K COLOR TFT-LCD, TRANSMISSIVE,
 2. OPERATING TEMP: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
 3. STORAGE TEMP: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$
 4. LCD DRIVER: ILI9342C
 5. BACKLIGHT: 4CHIP-WHITE LED
 6. 符合ROHS要求
 7. "*"CONTROL DIMENSION

CUSTOMER APPROVE		AMEND		名称		TOLERANCE: DECIMAL		PRODUCT NO.		DRAW NO.		REV	
Mechanical	Electrical	CONTENT1	CONTENT2	CONTENT3	CONTENT4	DATE1	DATE2	DATE3	DATE4	DWN	gishuoping	DSN	A
		NO.	CONTENT	DATE	DATE	$\pm 1/4$	$\pm 1/4$	$\pm 1/4$	$\pm 1/4$	CHKD	NOT IN SCALE	UNIT mm	SHEET: